


The Characteristics of the DI Channel

- The Input Signal and Internal Signal is Isolated by Photoelectric Coupling Technique
- The Rated Voltage Supply is 24V DC
- Each Group Has Four Routs Output
- The Rated Output Current of Each Rout is 500mA
- The Highest Output Frequency:1KH

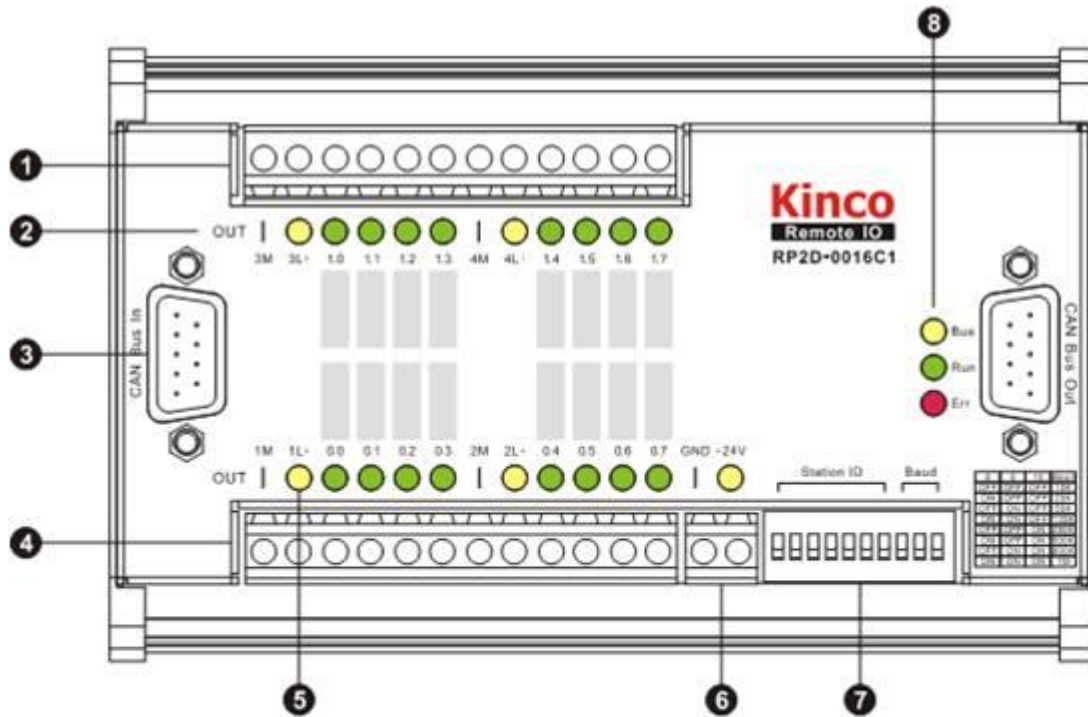

- | | |
|-----------------------------|---------------------------------------|
| ① — Digital output terminal | ⑤ — Power indicator |
| ② — States indicator of I/O | ⑥ — System power |
| ③ — Communication port(CAN) | ⑦ — Baud rate and station No. setting |
| ④ — Digital output terminal | ⑧ — States indicator of CPU |